


## SNAP REEL BANDS

### PERFORATED — READY TO SNAP AND USE!

- Easy to use – Simply snap off and use.
- Takes less space – Keep Reel Bands by your workstation.
- Strength - 0.3mm wider than carrier tape widths x 1.0mm thick.

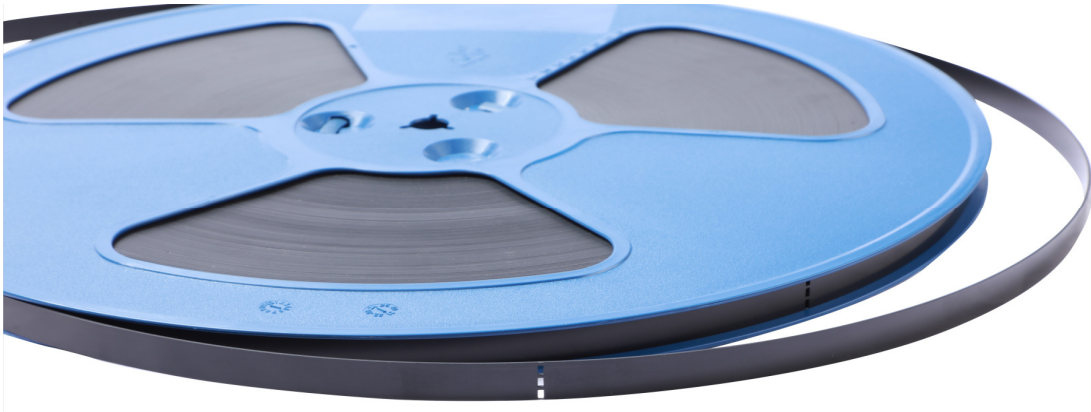

The Snap Reel Bands provide additional protection for components that are packaged in tape and reel. The Snap Reel Bands are designed to wrap around the outer layer of carrier tape to withstand the pressure for keeping the carrier tape safe from crushing. The Snap Reel Bands are perforated to various lengths such as 1.09M long for 13” reels, 1.25M long for 15” reels, and 1.81M for 22” reels. All Reel Bands are composed of conductive polystyrene material.

MATERIAL PROPERTIES			
PROPERTY	TYPICAL VALUE	UNIT	TEST METHOD/CONDITION
Surface Resistivity	10 <sup>4-6</sup>	Ohms/sq	ASTM D-257
Tensile Strength	19.2	Mpa	ISO527
Elongation	24	%	ISO527
Specific Gravity	1.06	g/cm <sup>3</sup>	ASTM D-792
Thickness	1.0mm	N/A	N/A
Color	Black	N/A	N/A

### Recommended Storage Conditions:

- 1) Storage Temperature: 0~ 40°C
- 2) Relative humidity: < 65%RH
- 3) Be protected from direct sunlight and moisture

